


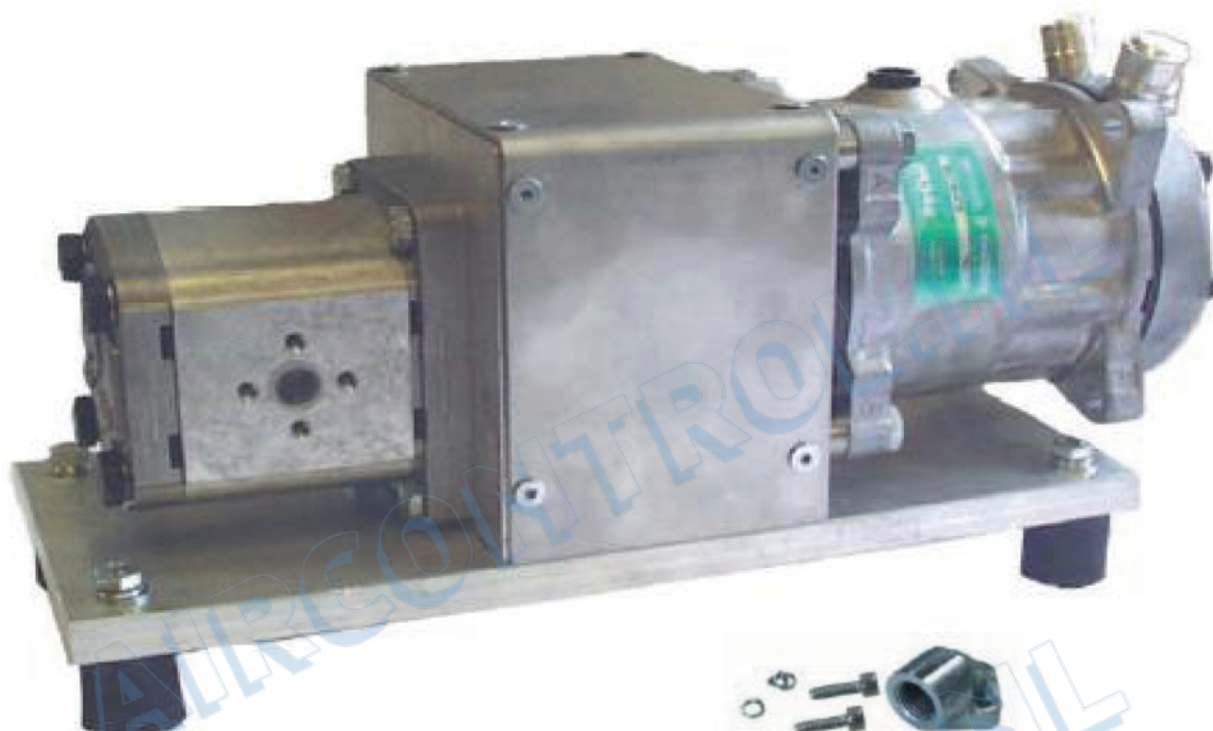

SPECIFICATION :

Rotation Clockwise

Displacement 14 cm³ / rev

Max continuous pressure (pl) 260 bar

Max speed at pressure (pl) 4000 rpm

Min speed at pressure (pl) 600 rpm

Operation temp range - 25 gr C to + 80 gr C

Recommend pressure 50-70 bar at 20-40 l/min

Compressor must be installed within +/- 45 gr from vertical and within +/- 10 gr along the shaft axis.

l x b x h = 390 x 150 x 200 mm

Mounting distance shock absorbers 315 x 115 mm

SHOCK ABSORBERS HEIGHT 30 mm (optional)

P/N: 100010